


**Product Description:**

The Enlite range of Slim-Fit™ low profile downlights are engineered to deliver superior light output and uniformity utilising the latest edge-lit LED technology. At only 25mm deep including bracket, they are an ideal solution where ceiling voids are limited but high lumen output is required.

**Product Image:**

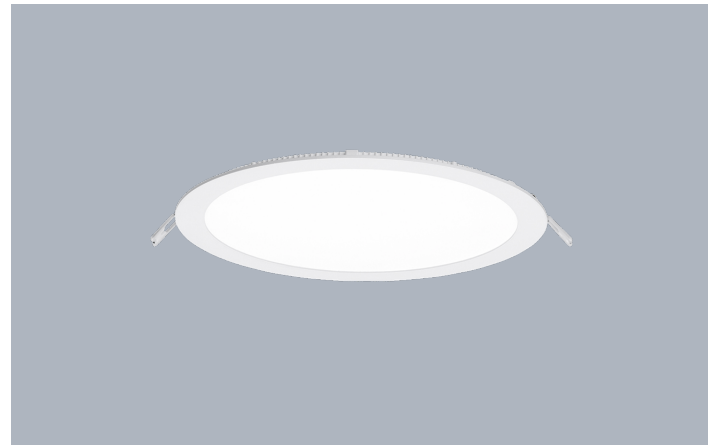


Slim-Fit™ 24W IP44 Round Low Profile LED Downlight


**Product Features:**

- Low cost energy saving alternative to compact fluorescent fittings
- Edge-lit low profile ideal for installations with limited recess space (25mm) and shallow ceiling voids
- Plug and play remote driver for easy installation (40mm space required)
- Separate triac dimmable driver available
- Life not affected by frequent switching e.g. when used with occupancy controls
- 1.5kV surge protected
- IP44 rated
- 3 year warranty

**Line Drawing Image**

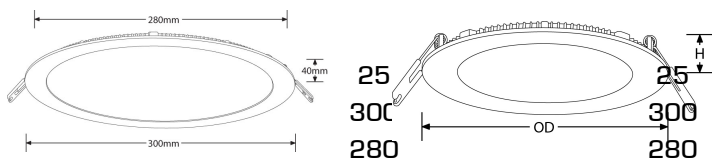

**Polar Curve Image**




**Product Specs:**

Technology	LED	Number of LEDs	120
Luminaire Distribution	Accent	Lifetime L70 (hrs)	25000
Input Voltage	100 ~ 240V AC	Input Frequency	50/60HZ
Dimmable	No	IP Rating	IP44
IK Rating	IK07	Operating Env. Temp. (Min) °C	-20
Operating Env. Temp. (Max) °C	40	Power Factor	0.9
Overall Diameter (mm)	300	Recess Depth (mm)	50
Cutout Diameter (mm)	280	Lamp Base	None
Height (mm)	25	Surge Protection (kV)	1.5
SDCM	6		

## SKU Table and Ordering

SKU Code	Wattage	Lumens	Lumens/Watt	Colour	Beam Angle	Ra	SDCM
EN-PL24B/30	24	1450	60.42	3000	110	80	6
EN-PL24B/40	24	1600	66.67	4000	110	80	6
EN-PL24B/65	24	1750	72.92	6500	110	80	6
EN-PL24BDA/30	24	1450		3000	110	80	6
EN-PL24BDA/40	24	1600		4000	110	80	6
EN-PL24BDA/65	24	1750		6500	110	80	6
EN-PL24BV/30	24	1450		3000	110	80	6
EN-PL24BV/40	24	1600		4000	110	80	6
EN-PL24BV/65	24	1750		6500	110	80	6

### Compliance & Approvals:



### Accessories:

SKU Image	SKU Code	Description
	EN-PLDD24	Slim-Fit™ 24W 320mA Dimmable Driver For Low Profile Downlight
	EN-DLEM2	3 Hour Non-Maintained Emergency Pack

### Warranty

This product has a warranty period of 3 Years. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

**UK Enlite Sales & Distribution**  
 Apex Park  
 6 Little Burrow  
 Welwyn Garden City AL7 4SW  
 United Kingdom  
 Tel : +44 (0) 1707 35 18 20