LED 2D Bulkheads

by Cixi Optoelectronics Co Ltd.

LED 2D Bulkheads

Applications:

- Replaces fluorescent 2D tubes
- Retail and commercial applications
- Architectural lighting

Key Features:

- High lumen output
- Microwave sensor option
- 3 Year extended warranty

Product Features Include:

- Up to 60% energy savings
- Instant ON at full brightness
- Last 3-5 times longer than traditional lamps
- No glass - shatterproof polycarbonate
- No phosphor, mercury, or lead
  Easy installation
- No flicker or hum
- Maintenance free
- No UV light emitted
- Useful life expectancy > 50,000 hours

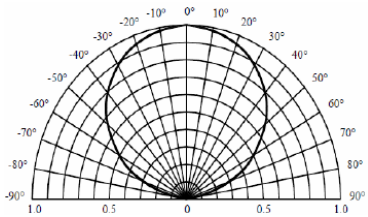

IP54 Bulkhead

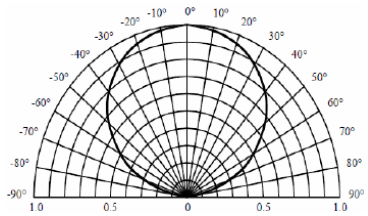

IP65 Bulkhead

IP54 Bulkhead 4500K

Power	16W
Input Voltage	110-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	>100lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-10 to +50°C
Housing/Cover	Polycarbonate
Dimensions	327x110mm
Weight	1.1/1.3kg
Part Number Standard	**NET 17-06-17**
Part Number Emergency	**NET 17-06-19**

IP54 10% MS Bulkhead 4500K

Power	16W
Input Voltage	110-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	>100lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-10 to +50°C
Housing/Cover	Polycarbonate
Dimensions	327x110mm
Weight	1.5/1.7kg
Part Number MS	**NET 17-06-21**
Part Number MS + Emergency	**NET 17-06-27**

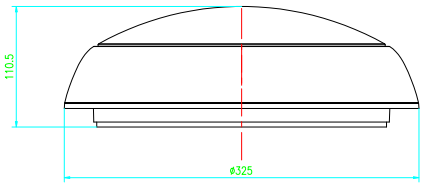

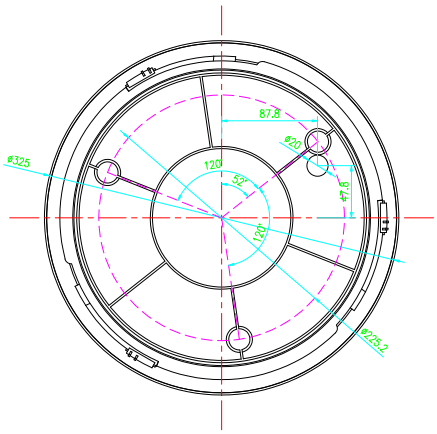

IP65 Bulkhead 4500K

Power	16W
Input Voltage	110-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	>100lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-25 to +55°C
Housing/Cover	Aluminium/PC
Dimensions	365x140mm
Weight	3.1/3.3kg
Part Number Standard	**NET 17-06-07**
Part Number Emergency	**NET 17-06-09**

IP65 Bulkhead

IP65 10% MS Bulkhead 4500K

Power	16W
Input Voltage	110-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	>100lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-25 to +55°C
Housing/Cover	Aluminium/PC
Dimensions	365x140mm
Weight	3.3/3.5g
Part Number MS	**NET 17-06-23**
Part Number MS + Emergency	**NET 11-01-31**

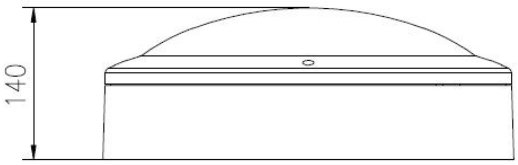

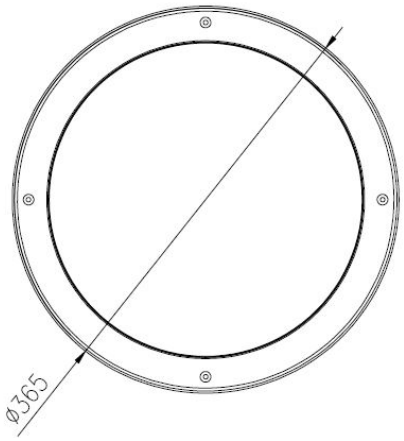

CE RoHS

IES data files available.

WARRANTY 3 YEAR

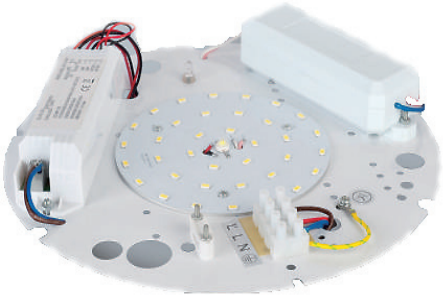

Bulkhead Gear Tray with 3H Emergency

Bulkhead Gear Tray 4500K

Power	16W
Input Voltage	100-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	100>lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-10 to +55°C
Weight	360/540G
Part Number Standard	**NET 17-06-11**
Part Number EM	**NET 17-06-13**

MS Bulkhead Gear Tray 4500K

Power	16W
Input Voltage	100-240V AC
Power Factor	>0.90
LED Luminous Flux	1700lm (EM 1700/150lm)
Luminous Efficacy	>100lm/W
Colour Temperature	4500K
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-10 to +55°C
Weight	440/620g
Part Number MS	**NET 17-06-15**
Part Number MS + EM	**NET 17-06-29**

IP54 Bulkhead with Chrome Ring

2D IP54 BHD Chrome Ring

Accessory for	IP54 2D Bulkhead
Weight	180g
Part Number	**NET 17-06-06**

IP65 Bulkhead with Half Moon Cover

2D IP65 BHD Half Moon Cover

Accessory for	IP65 2D Bulkhead
Weight	820g
Part Number	**NET 17-06-25**

CE RoHS

IES data files available.

WARRANTY 3 YEAR